


## Hot water circulation system WZS 75

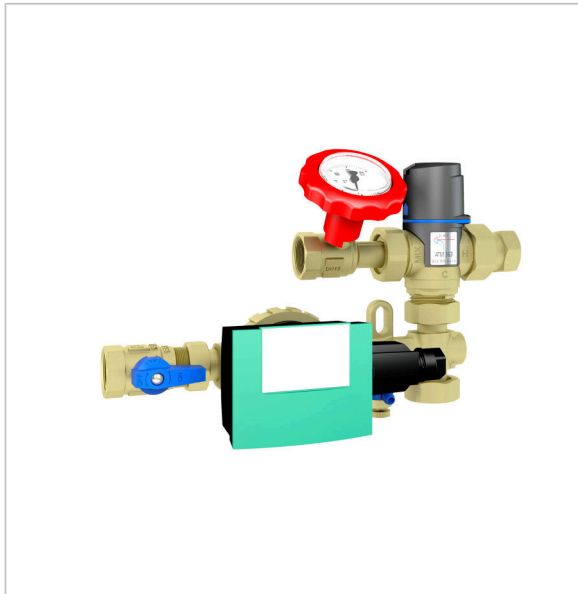

### Benefits

- Compact hydraulic assembly for storage tanks with existing safety-related equipment
- Easy connection of a circulation line with existing safety-related equipment
- Thermally controlled hot water temperature (with scald protection)
- Considerable time savings during mounting

### Application

Circulation system for professional implementation of a service water circulation connection to an energy storage tank with existing safety-related equipment (hot water tank/stratified storage tank) which is operated at temperatures higher than 60 °C either permanently or temporarily. WZS 75 is ideal for retrofitting existing systems, primarily in single-family and two-family homes.

### Versions

	Part no.
Hot water circulation system WZS 75	68416

Blue part no. = in-stock items

### Description

Compact, pre-assembled and tightness-tested hot water circulation system, consisting of thermal mixing valve with integrated scald protection, thermometer, shut-off valve, drain valve for venting or flushing the circulation line as well as connection parts as per DIN 1988. The hydraulic assembly is suitable for storage systems which are already fitted with safety-related equipment such as diaphragm safety valves backflow preventers or where such equipment is to be installed in the form of conventional individual components. Storage systems without safety-related equipment can be retrofitted with the safety group assembly WSG 150.

WZS 75 optimises temperature control in the hot water circulation and ensures that the temperature in the storage system is not unnecessarily reduced. A partial volume of the returning circulation water flows directly to the cold water inlet of the thermal mixing valve via an internal connection. Depending on the water temperature at the inlet of the mixing valve, it is then controlled as required.



## Technical specifications

### System connections

G $\frac{3}{4}$  female thread, G1 female thread

### Operating temperature range

Medium: Max. 95 °C

### Mixing temperature

35/60 °C

### System pressure

Max. 10 bar

### Flow coefficient Kvs

1.6 m<sup>3</sup>/h

### Housing

Brass

### Dimensions

W x H x D: 297 x 188 x 116 mm

### Circulation pump

Wilo-Star-Z NOVA

### Degree of protection

IP 42 (EN 60529)

### Supply voltage

AC 230 V, 50 Hz

### Power input

2 – 4.5 W

### Scope of delivery

- Assembly without insulation

## Technical drawings

